

Silicon N Channel Power MOSFET

## Description

The HXN0480 is n-channel power trench MOSFET with latest technology. So fast switching speed and low on-resistance. Usually used at power switching application . It is also intended for any applications with low gate drive requirements .

## Features

- Latest Trench Power MOSFET technology
- Low On-state Resistance
- High Current Density
- Low Gate Charge
- 100% UIS Test


## Product Summary

BVDS	RDSON	ID
40V	5.5mΩ	80A

## Applications

- Motor Driver
- Power Management

TO-220 Package

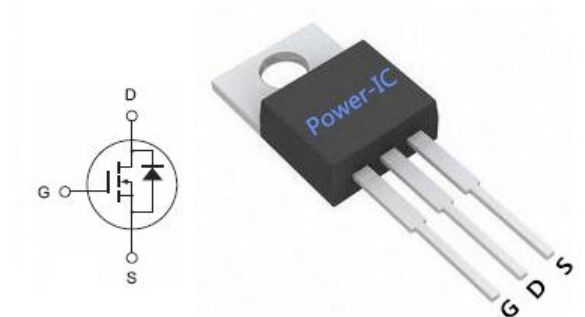

### 1. Absolute maximum ratings

Symbol	Parameter	Value	Unit
$V_{DS}$	Drain-source voltage ( $V_{GS} = 0$ )	40	V
$V_{GS}$	Gate-source voltage	$\pm 20$	V
$I_D^{(1)}$	Drain current (continuous) at $T_C = 25\text{ }^\circ\text{C}$	80	A
$I_{DM}^{(2)}$	Drain current (pulsed)	300	A

**Silicon N Channel Power MOSFET**

$P_D$	Power dissipation at $T_C = 25\text{ }^\circ\text{C}$	100	W
$E_{AS}^{(3)}$	Single pulse avalanche energy	400	mJ
$T_j$	Operating junction temperature	-55 to 150	$^\circ\text{C}$

1. Current limited by package
2. Pulse width limited by safe operating area
3. Starting  $T_j = 25\text{ }^\circ\text{C}$ ,  $I_D = 28\text{A}$ ,  $V_{DD} = 30\text{V}$ ,  $L = 1\text{mH}$

**2、 Thermal data**

Symbol	Parameter	Min.	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient		62.5		$^\circ\text{C}/\text{W}$
$R_{\theta JC}$	Thermal Resistance Junction-Case		0.5		$^\circ\text{C}/\text{W}$

**3、 Electrical characteristics**

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{(BR)DSS}$	Drain-source breakdown	$I_D = 250\mu\text{A}$ , $V_{GS} = 0$	40			V
$I_{DSS}$	Zero gate voltage drain	$V_{DS} = \text{Max rating}$			1	$\mu\text{A}$
$I_{GSS}$	Gate body leakage current	$V_{GS} = \pm 20\text{V}$			$\pm 100$	nA
$V_{GS(th)}$	Gate threshold voltage	$V_{DS} = V_{GS}$	1	2	3	V
$R_{DS(on)}$	Static drain-source on resistance	$V_{GS} = 10\text{V}$		5.5		$\text{m}\Omega$
		$V_{GS} = 4.5\text{V}$		6		$\text{m}\Omega$
$C_{iss}$	Input capacitance	$V_{DS} = 25\text{V}$		3000		pF
$C_{oss}$	Output capacitance	$f = 1\text{ MHz}$		230		pF
$C_{rss}$	Reverse transfer	$V_{GS} = 0$		170		pF
$Q_g$	Total gate charge	$V_{DD} = 30\text{V}$		30		nC
$Q_{gs}$	Gate-source charge	$I_D = 40\text{A}$		12		nC
$Q_{gd}$	Gate-drain charge	$V_{GS} = 10\text{V}$		9		nC
$I_{SD}$	Source-drain current				80	A

**Silicon N Channel Power MOSFET**

$I_{SDM}^{(1)}$	Source-drain current (pulsed)				300	A
$V_{SD}^{(2)}$	Forward on voltage	$I_{SD} = 80A, V_{GS} = 0$			1.2	V

1. Pulse width limited by safe operating area
2. Pulsed: pulse duration=300 $\mu$ s, duty cycle 1.5%